

LEASING PROPOSAL REQUEST

Agency, Office Name	Department of Children's Services (DCS) & Department of Human Services (DHS) in Monroe County
Principal Use Office/Warehouse/Other	Professional Office
Employee Headcount at Premises	DCS: 21 employees DHS: 20 employees
Transaction Number	DCS: TR. 19-09-905 (bid together with DHS) DHS: TR. 19-09-906 (bid together with DCS)

	Desired	Alternates Accepted
Service Area and Boundary Requirements	<p>DCS and DHS operations shall exist in contiguous space in Monroe County. As this office provides services to the public, the preferred location is obvious from a public road, includes ease of access and identifiable exterior signage. When available, the preferred location provides municipal water and sewer systems.</p> <p>DCS: Preference that location should be centrally located near government agencies, schools, courts, public transportation lines, if available in the area. Location cannot be within 1,000 feet of Department of Correction facilities where perpetrators have access to children.</p>	NO
Parking Requirements	<p><u>Parking Spaces Required</u> Free, paved, well lit, striped parking. The parking provided shall include handicap parking to meet the relevant code requirements and special considerations below. DCS: 16 Staff 22 Client = Spaces required 38 DHS: 19 Staff 15 Client = Spaces required <u>34</u> TOTAL Spaces Required: <u>72</u></p> <p>STAFF PARKING - Special considerations and preferences:</p> <ul style="list-style-type: none"> - Staff Parking area (DCS: 16 and DHS: 19 for total of 35 parking spaces) must be safe, secure, with direct access to building. The entirety of staff parking area is to be well lit and the perimeter of the staff parking area is to be fenced and shall include a motorized gate(s) to provide access via a card, fob, code, or otherwise. - 8' minimum height, chain link fence w/ visual screening material. Landlord to provide electronic wiring and power in conduit to gate(s). Tenant to provide and install card reader system (State security vendor will provide and install card reader via State contract w DGS). - If Staff Parking is proposed for DCS, then it shall also be furnished for DHS 	No

	Desired	Alternates Accepted
Usable & Rentable Contiguous Square Footage	<p>DCS: USF 4,000 – 4,600 / estimate 4,600 – 5,200 RSF DHS: USF 4,600 – 5,300 / estimate 5,300 – 5,600 RSF Totals: USF 8,600 – 9,900 / Estimated 9,900 – 10,800 RSF</p> <p>The State intends the contiguous square footage to be</p> <ul style="list-style-type: none"> - Usable square footage does not include restrooms, mechanical rooms, janitor closets, telecom closets or vestibules. - Proposed space should not exceed 15% of the estimated rentable square footage (RSF) range specified above. It should not be less than the requested rentable space combined. 	No
Special Buildout and Other Specifications	<p>Turnkey buildout in accordance with Schedule 1: DCS Preliminary Zone Placement Summary Sheet, Schedule 2: DCS Space Needs Analysis, Schedule 3: DCS Concept Study Plan, Schedule 4: DHS Preliminary Zone Placement Summary Sheet, Schedule 5: DHS Space Needs Analysis, Schedule 6: DHS Concept Study Plan, Schedule 7: Exhibit D to Lease Agreement, Schedule 8: Transaction Window Elevation and Pro Forma Pre-Bid Lease. Adherence to zone separation of each Agency is necessary.</p> <ul style="list-style-type: none"> - All State leased offices are required to obtain State Fire Marshall Office approval or waiver which is the Lessor's Duty to Obtain and Furnish to the State. - Building must include 24 hour access, appropriate HVAC, and other applicable building systems as appropriate for business operation. - Separate Restrooms for Clients and Staff - Separate Entrances for Clients and Staff 	No
Term Length	Ten years	Yes
Commencement Date	Within 12 months of executed lease	Yes
Termination Options	Termination for Convenience: 90 day per Block 6 of Lease. Termination for Cause: see Lease - Exhibit A, Paragraph 5.	Yes
Terms and Conditions	As set forth in State of Tennessee Pro Forma Lease. A copy of the Pro Forma Lease document can be found at www.tnlprr.gov https://www.tn.gov/general-services/real-estate-/lease-management/lease-proposal-requests--lprs-.html	Yes

	Desired	Alternates Accepted
	underneath "Standard Forms" at "Lease Template" Any comments to the Lease Template will be required along with your submission of the Lease Proposal Quotation Form at the time Lease Proposals are submitted.	
Utility, Services and Other Costs	Preference is for FULL SERVICE Gross lease with no pass throughs; however, Proposal may be quoted as MODIFIED GROSS with Tenant paying Utilities and/or Janitorial. Utilities must be separately metered for Modified Gross consideration.	Yes

Communications:

Interested parties must direct all communications regarding this procurement to the Leasing Coordinator, the State's official point of contact. Email is the preferred form of communication.

Name: Cristina Johnstone, Leasing Coordinator

Phone Number: 615-939-3108

Email: rfp.coordinator@tn.gov

The completed "Lease Proposal Form" aka Lease Proposal Quotation Form must be submitted as follows no later 4pm on October 24, 2019 (Central time).

Submittals must be received via either:

Email: RFP.Coordinator@tn.gov

(It is recommended that any email submission be sent 'returned receipt requested' and confirm email is received)

And/Or

Printed copy to:

Department of General Services/STREAM

Attn: Nickie Smith Herren, Procurement Officer

William R. Snodgrass Tennessee Tower 3rd Floor

312 Rosa L. Parks Avenue, Nashville, TN 37243

Phone: 615-428-9840 or 615-532-7475

Method of Evaluation:

Please refer to the State of Tennessee Real Estate Asset Management Division website for the complete document, which describes the proposal Evaluation Method, by using the following link:

https://www.tn.gov/content/dam/tn/generalservices/documents/stream/leasing/Section_IV-STREAM_LeaseProposalPackage-Evaluation_Method.pdf

Disclaimer of Subjectivity:

Proposers should understand and accept that by responding to this solicitation they are willingly participating in a process that may consist of some degree of subjectivity. Proposers should be aware that the proposal determined to best meet the needs of the State may not necessarily be the lowest cost proposal.

Protest Process:

Any protests or appeals of protest pursuant to this Proposal Request or the Notice of Intent to Award shall be handled in accordance with the SBC By laws, Policy and Procedure Item 18.

PROJECT SPECIFIC REQUIREMENTS

The space must be professional office use and capable of meeting all of the requirements of the agency, including geographic location, square footage, parking and any special requirements identified below and in the Schedules applicable to each Agency.

Landlord shall furnish and install metal window blinds for all exterior windows.

See the Pro Forma Lease document - Exhibit D for General Specifications and Interior Design Standards.

Attachments:

Schedule 1: DCS Preliminary Zone Placement Summary Sheet

Schedule 2: DCS Space Needs Analysis

Schedule 3: DCS Concept Study Plan

Schedule 4: DHS Preliminary Zone Placement Summary Sheet

Schedule 5: DHS Space Needs Analysis

Schedule 6: DHS Concept Study Plan

Schedule 7: Exhibit D to Lease Agreement

Schedule 8: Transaction Window Elevation

SCHEDULE 1
DCS PRELIMINARY ZONE PLACEMENT SUMMARY SHEET
(Subject to revision in final plan approved by State design team)



<u>Parking Totals</u> Staff: 16 Public: 22 Grand Total: 38

DCS Monroe County Summary Sheet

Staff Counts – Total Staff 21

Front Desk Receptionist – 1

Team Coordinator – 1

Case Manager (1-4) – 19

Zone One (Public Zone) – refer to sample plan for zone locations

Hard Wall Spaces

1. Waiting Room (120sf) – seating for 6 people
2. Accessible Public Restroom (Client and Staff restrooms will be separate and will not share the same plumbing wall; shall be equipped with diaper changing station, preferably wall mounted, with adequate wall reinforcement.
3. Front Desk Receptionist Window opens to Zone One

Zone Two (Intermediate Zone) – refer to sample plan for zone locations

Hard Wall Spaces

1. Drug Testing Restroom (64sf) - 1 (includes lockable wall or base cabinet for supply storage)
 2. Visitation Rooms (180sf) – 1
 3. Viewing/Supply Room (120sf) - 1 (with (2) one-way glass windows and light switch in room) (shelving 12"-15" deep)
 4. Multipurpose Room (120sf) – 1
 5. Conference Room (250sf) (seating for 15 people; do not have to be around table) - 1
 6. Conference Room (400sf) (seating 25 people; do not have to be around table) (rent will be shared with DHS (approx. ⅓) if co-located) – 1
(Secure corridor required in this zone)
-

Zone Three (Staff Zone) – refer to sample plan for zone locations

Hard Wall Spaces

1. File Storage Room (240sf) (shelving 12"-15" deep)
2. Children's Storage Room (120sf) - 1 (shelving 18"-24" deep)
3. Break Room (150sf) (rent will be shared with DHS (approx. ⅓) if co-located) - sized for 15 staff; see lease agreement for additional requirements
4. Telecom Room (48sf) (Room must be secure and temperature controlled)
5. Accessible Staff Restrooms (Client and Staff restrooms will be separate and not share the same plumbing wall)

Open Office (systems furniture)

1. Assigned Workstation (49sf) - 2
Front Desk Receptionist (1) – full size station
Team Coordinator (1) – glass-front cube
2. Quiet Free Address Workstations:
Workstation (25sf*) - 4
Workstation (49sf*) – 1 glass-front cubes
3. Collaborative Free Address Workstations:
Workstation (30sf*) - 8
4. Fax Machine Area (5sf) - 1
5. Mail Area (30sf) - 1
6. Print Area (50sf) – 1 (near reception)
7. Recycle Bin (6sf) – 2
8. Shredder Bin (6sf) - 2
9. Locker Units (64sf) - 4
10. Lateral File Cabinets in Open Area (160sf) – 20 cabinets

General Notes

1. Visitation room, viewing room, and enclave doors shall have passage hardware. Large conference room doors shall have keyed locks. Drug testing room door shall have locking hardware with "emergency lock-out" feature, that allows employees to gain access to a room when a client may have locked themselves inside, whether accidentally or intentionally. This does not apply to secure rooms such as hardwall offices, file and storage rooms, or large meeting rooms.
2. Agency expense items include any needed convex mirrors in the waiting room, card readers and associated electric strike, and wi-fi throughout the space.

*See Workstation Legend below

Workstation Legend	
25sf Quiet Or Collaborative^	Pin Wheels, 24x60 Hoteling
30sf Quiet Or Collaborative^	30x72 Hoteling
49sf Quiet Or Assigned	Full Size Stations, Glass Front cubicle
Collaborative Open Area	Enclave table with 4 chairs, Tablet arm lounge chairs, Worksurface on top of storage with 4 stools

^Quiet or Collaborative function determined by panel height

SCHEDULE 2
DCS SPACE NEEDS ANALYSIS
 (Subject to revision in final plan approved by State design team)

Space Needs Analysis Report
 SNA Number: 36910-62-01
 Agency: Children's Services
 County: MONROE City: Madisonville
 Employees: 21
 SNA Date: 06-21-2019

Prepared By: FMG
 Checked By:

Area Needed: 2,632
 Major Circulation: 60% 1,316
 Total Net Usable Needed: 3,948

SNA Note: AIG project. Report created with information supplied and approved by Claire.

Space Type	Standard Description	Wall	Area	Count	Memo
P	79186 Case Manager	None	0	19	Case Manager 1, 2, 3 and 4 positions. Mobile. Space included in Free Address area. Positions will use Free Address area when in office.
P	02942 Secretary	0	49	1	Front Desk Receptionist.
P	00000 Team Coordinator	0	49	1	
G	BR Break Room	H	150	1	With base and wall cabinets, countertop with sink.
G	CSR Childrens Storage Room	H	120	1	
G	CR Conference Room	H	400	1	Seating for 26.
G	DTR Drug Testing Room	H	64	1	With watercloset and countertop with lavatory.
G	FMA Fax Machine Area	0	5	1	
G	FGR File Storage Room	H	240	1	
G	FAH Free Address Hoteling	0	25	4	
G	FAH Free Address Hoteling	0	30	8	
G	FAH Free Address Hoteling	0	49	1	Glass Cubes.
G	MA Mail Area	0	30	1	
G	MFP Multi-Function Printer	0	50	1	
G	MR Multipurpose Room	H	120	1	
G	PL Personal Lockers	0	64	1	Space for 4 - Locker Units. Each unit will contain 6 individual lockers. Centrally located where needed. For use by free address staff.
G	RB Recycle Bin	0	6	2	
G	SB Shredder Bin	0	6	2	
G	SCR Small Conference Room	H	250	1	Seating for 15.
G	SS Supplemental Space	0	160	1	Space for 20 - Lateral File Cabinets located in wide hallways. Used by Free Address staff.
G	TC Telecom. Closet	H	48	1	For telephone and computer equipment. Room must be temperature controlled.

Printed On 5/21/2019

Page 1 of 2


SNA Number: 36910-62-01

Space Type	Standard Description	Wall	Area	Count	Memo
G	VGR Viewing & Supply Room	H	120	1	With one - way glass and mini-blinds for viewing into Visitation Room.
G	VR Visitation Room	H	180	1	
G	WR Waiting Room	H	120	1	Seating for 6. With transaction countertop and pass-thru window to Secretary. Waiting room will need direct access to 1- unisex Client Restroom. Client and Staff restrooms will be separate and will not share the same plumbing wall

Suggested Range: Min. Max.
 Usable: 4,000 4,600
 Rentable: 4,600 5,200

SCHEDULE 3 DCS CONCEPT STUDY PLAN

This is a concept plan to illustrate the three (3) security zones required for DCS. It should NOT be used to price construction but only to provide a "concept" of how DCS conducts business in the space. Each DCS office requirement differs for each county across Tennessee and the State reserves the right to layout the space to best fit the needs of DCS in Monroe County TN. Per Paragraph #19 (Landlord buildout) of the Lease Agreement, the State must approve the final design and construction plans.

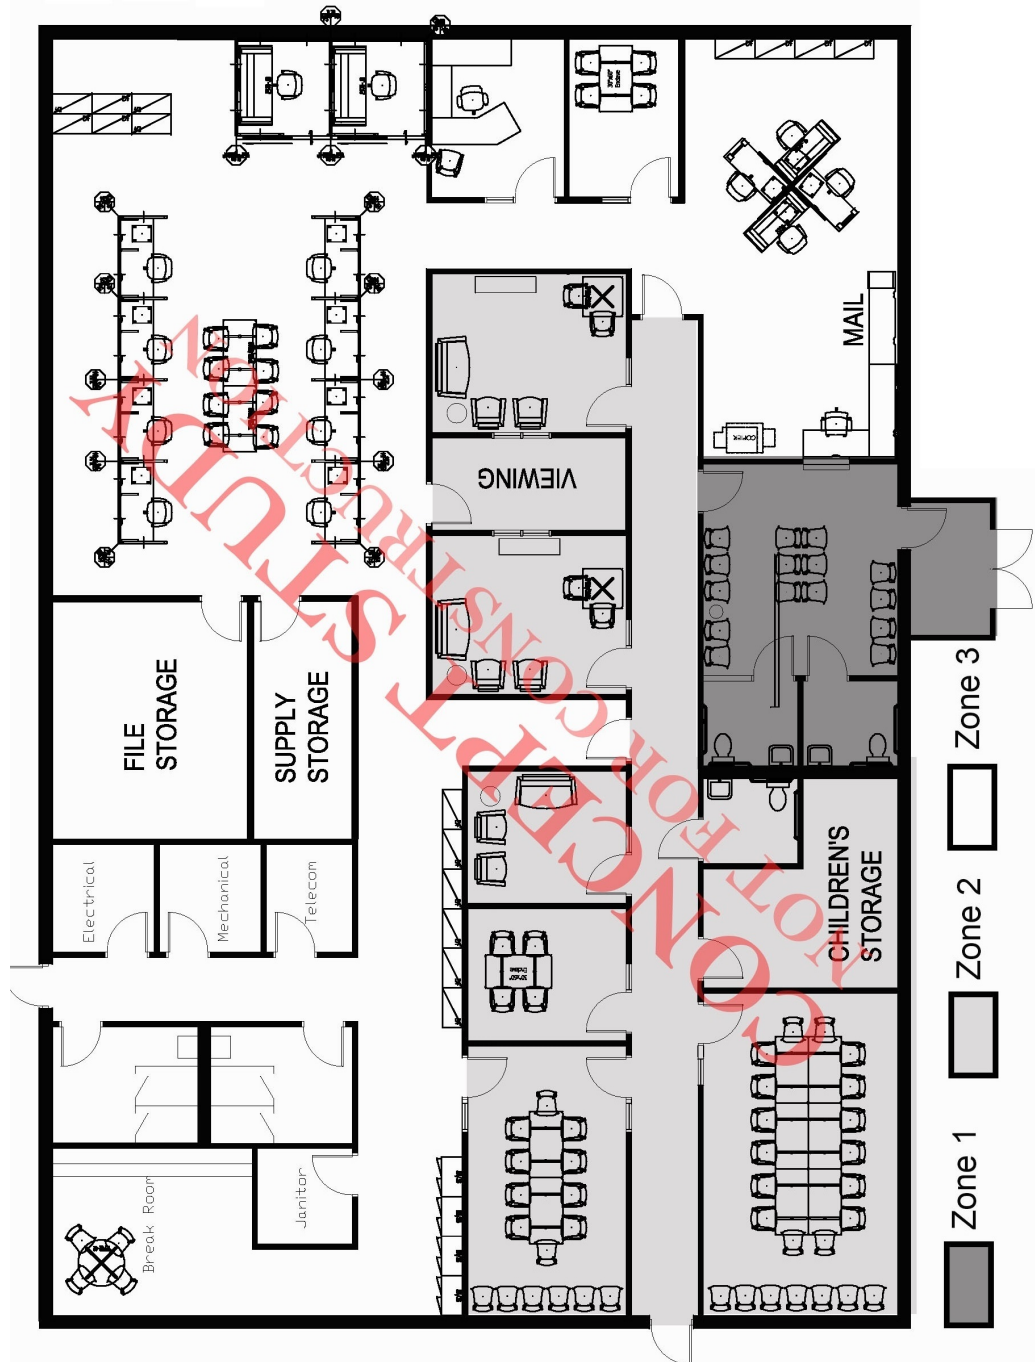

SCHEDULE 4
DHS PRELIMINARY ZONE PLACEMENT SUMMARY SHEET
(Subject to revision in final plan approved by State design team)



DHS Monroe County Summary Sheet

Staff Counts – Total Staff 20

FMD1 – 1

Field Supervisor – 1

Eligibility Counselor (intake) – 6

Eligibility Counselor (renewal) – 5

Administrative Secretary - 1

Secretary – 2

Eligibility Clerk – 1

Client Representative – 1

APS Worker – 1

ETSU – 1 (in office 1-2 days a week; client testing; require specialty equipment in the workstation for testing)

Zone One (Public Zone) – refer to sample plan for zone locations

Hard Wall Spaces

1. Waiting Room (500sf) – seating for 16 people

Security Check-In (80sf)

Public computer access (50sf)

Staff/Client Window Bays (xxsf) - 3 total

Secretary (2)

Eligibility Clerk (1)

2. Accessible Public Restrooms – quantity determined by plumbing code requirements (Client and Staff restrooms will be separate and will not share a plumbing wall)

3. Conference Room (295 sf) – seating for 18 people, do not have to be around table

(Access to conference room from both zones required – refer to sample plan)

4. Enclaves (120sf) – 1

(Access to enclave from both zones required – refer to sample plan)

(Secure access to Zone Two from here)

SCHEDULE 5
DHS SPACE NEEDS ANALYSIS
 (Subject to revision in final plan approved by State design team)

Space Needs Analysis Report
 SNA Number: 34501-62-01
 Agency: Human Services
 County: MONROE City: Madisonville
 Employees: 20
 SNA Date: 03-27-2019

Prepared By: FMG
 Checked By:

Area Needed: 3,031
 Major Circulation: 60% 1,618
 Total Net Usable Needed: 4,647

SNA Note: AWC project. Report completed per information approved and supplied by Claire Claytor. 3

Space Type	Standard Description	Wall	Area	Count	Memo
P	02943 Admin. Secretary	0	49	1	
P	00000 Client Rep.	None	0	1	Mobile. Space provided in Free Address area. Position will use Free Address area when in office.
P	76115 Eligibility Clerk	0	49	1	
P	79622 Eligibility Counselor	None	0	4	Mobile. Space provided in Free Address area. Positions will use Free Address area when in office.
P	79622 Eligibility Counselor	0	49	8	Including ETSU Counselor
P	79824 Field Manager Director	H	120	1	
P	79681 Field Supervisor	H	120	1	
P	00000 Secretary	0	49	2	
P	79632 Social Counselor 2	None	0	1	APG. Mobile. Space provided in Free Address area. Position will use Free Address area when in office.
G	BR Break Room	H	150	1	With base and wall cabinets, countertop with sink.
G	CA Collaborative Area	0	85	1	
G	CR Conference Room	H	295	2	Seating for 18.
G	E Enclave	H	120	2	
G	FMA Fax Machine Area	0	5	1	
G	FA File Area	0	96	1	Space for 6 - Lateral File Cabinets used for central file storage.
G	FAH Free Address Hoteling	0	49	3	
G	FAH Free Address Hoteling	0	30	1	
G	FAL Free Address Lockers	0	16	1	Space for 1 - locker unit. Unit contains 6 - lockers. Used by Free Address Staff.
G	MA Mail Area	0	36	1	
G	MFP Multi-Function Printer	0	50	2	
G	PGB Paper Shredder Bin	0	6	1	
G	RB Recycle Bin	0	6	1	

Printed On 3/28/2019

Page 1 of 2


SNA Number: 34501-62-01

Space Type	Standard Description	Wall	Area	Count	Memo
G	GS Supplemental Space	0	48	1	Space for 3 - Lateral File Cabinets.
G	GR Supply Room	H	100	1	
G	TC Telephone Closet	H	48	1	For telephone and computer equipment. Room must be temperature controlled.
G	WR Waiting Room	H	500	1	Space for 16 chairs, Security check-in (80 sq.ft.) and Public computer (50 sq.ft.) areas. With transaction countertops and pass-thru windows to Secretaries (2) and Eligibility Clerk.

Suggested Range:	Min.	Max.
Usable:	4,600	5,300
Rentable:	5,300	6,000

SCHEDULE 6 DHS CONCEPT STUDY PLAN

This is a concept plan to illustrate the two (2) security zones required for DHS. It should NOT be used to price construction but only to provide a "concept" of how DHS conducts business in the space. Each DHS office requirement differs for each county across Tennessee and the State reserves the right to layout the space to best fit the needs of DHS in Monroe County TN. Per Paragraph #19 (Landlord buildout) of the Lease Agreement, the State must approve the final design and construction plans.

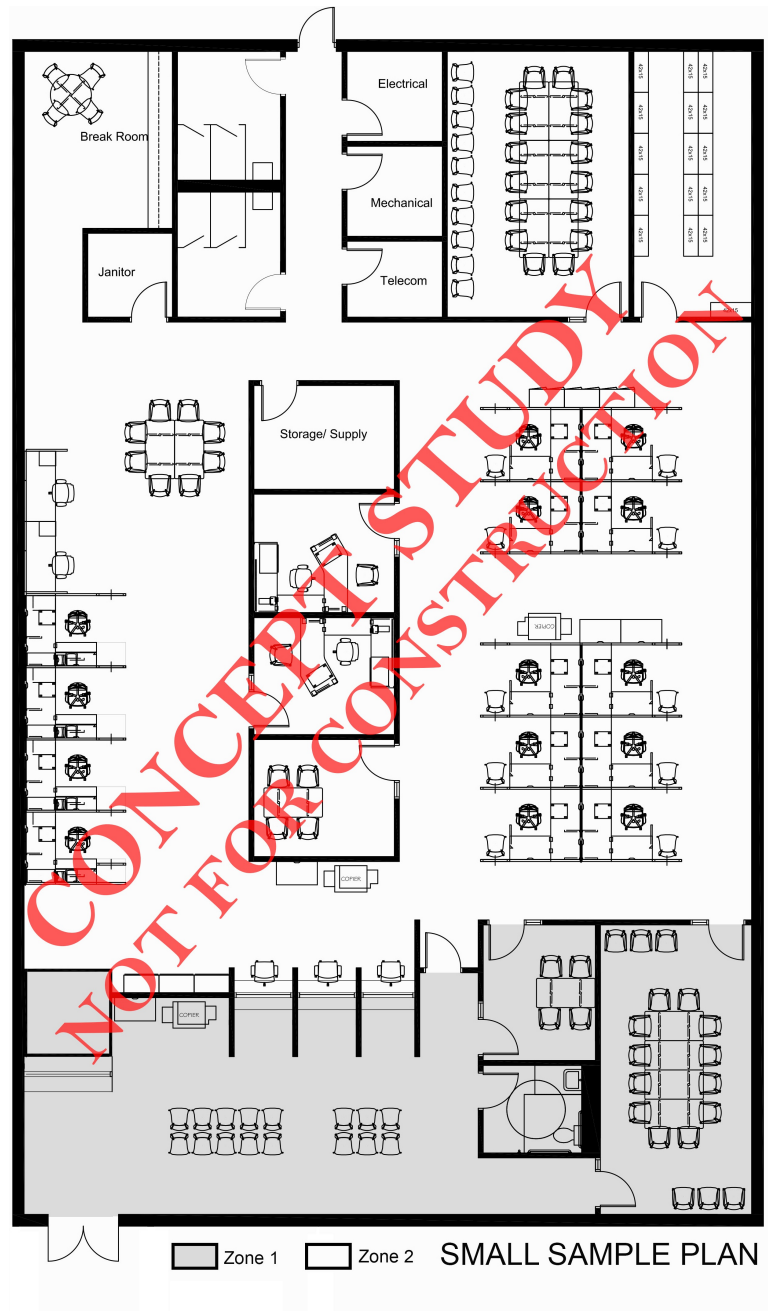

SCHEDULE 7
EXHIBIT D TO LEASE AGREEMENT
SPECIAL BUILDOUT AND OTHER SPECIFICATIONS

GENERAL SPECIFICATIONS

1. General

- a. The Leased Premises, including all common areas and points of ingress and egress, shall be designed and maintained to meet all applicable code requirements for commercial office building construction, including the requirements of the Americans with Disabilities Act.
- b. The Leased Premises shall have a current occupancy permit issued by the local jurisdiction at the time of Tenant's occupancy.

2. Site

- a. The site shall be fully graded, landscaped and maintained in a manner commensurate with market for comparable properties of the same property type and class as the Leased Premises.

3. Structure

- a. Space above ceilings must allow sufficient clearance for ease of installation of Tenant's mechanical and electrical equipment, including but not limited to distribution ductwork, HVAC boxes, lighting and conduit.
- b. The building foundation and below-grade spaces shall be protected with a properly installed foundation drainage and waterproofing system.

4. Building Skin and Roof

- a. The building skin and roof will be complete and weather-tight including all exterior finish materials, cladding, sealants, glass and glazing including vision and spandrel glass, store front glass, exterior doors and hardware, membrane or built-up roofing, ballast, flashing, and other elements required to make the building weather-tight.

5. Building Common Areas

- a. The building entrance lobby, common corridors, restrooms, mechanical spaces, loading dock, trash removal spaces, and other common areas will be substantially complete.
- b. Restrooms shall be complete with all fixtures, partitions, accessories, lavatories, lavatory tops, and mirrors. Fixtures, partitions, and accessories shall be institution grade or better, and shall be water saving type, as appropriate. The finishes in restrooms shall be commensurate with market for comparable properties of the same property type and class as the Leased Premises.

6. Common Walls

- a. Common walls shall include slab-to-slab gypsum wallboard on the public side of all demising walls, corridors, stairwells, and other walls not interior to the Tenant space. All common walls shall be taped, blocked, finished and sanded. Landlord will install sound attenuation insulation on Tenant side of Common Walls and demising walls prior to Tenant finishes being installed.
- b. Common walls shall include entry and exit doors from common areas furnished and installed by Landlord. Doors and hardware shall be building standard or better.

7. Electrical

- a. Landlord shall provide a minimum of 7 watts per square foot for lighting and power.
- b. Landlord shall install all main switchboards, panel boards, distribution boards, transformer, bus duct, feeders and other equipment to completely distribute power to electrical closets on each floor in the Leased Premises. Landlord shall locate an electrical service panel in the electrical closet in the

Common Area on the same floor as the Leased Premises. Installation of electrical service up to and including the Tenant's service panel(s) shall be a base building cost.

- c. Landlord shall install all wiring, branch circuiting, conduit and devices for the complete electrical system to all public and common areas. Landlord shall provide at Landlord's expense all power wiring and connection for all mechanical equipment furnished as part of base building. Landlord shall provide at Landlord's expense all power wiring to life safety and fire protection systems.

8. Communications

- a. Landlord shall bring data/telephone service, as provided by the local data/telephone operating company, to the building Main Telephone Room.

9. Lighting

- a. Landlord shall furnish and install lights in all common areas.
- b. Building lighting levels must meet a minimum of 30 foot-candles at the desk and 20 foot-candles in corridors providing ingress and egress to the Leased Premises. Base building shall include a lighting level of at least 10 foot-candles or minimum levels to insure safety in other interior areas as set by the current version of the Illuminating Engineering Society of North America (IESNA).

10. Plumbing

- a. Plumbing tie-ins shall be provided for State's use for break room or other functions required by the Permitted Use.

11. HVAC

- a. Building common areas shall include heating, ventilation, and air conditioning systems in accordance compliance with current ASHRAE standards.
- b. All HVAC for the Leased Premises shall be installed with complete distribution to ceiling mounted diffusers and perimeter slot diffusers for exterior zones and distribution to VAV boxes for interior zones.

12. Building Directory

- a. If the Building has multiple tenants, Landlord shall provide a directory in the lobby of the Building.
- b. Landlord shall add Tenant's name to directory, and shall provide Tenant suite signage (suite entry door plaque or hall plaque, matching building graphics standards).

13. Keys

- a. Landlord shall supply Tenant with five (5) sets of keys at no cost. Additional keys shall be provided at Tenant's request at a reasonable cost. Keys should allow access to the Leased Premises, parking areas and other common areas of the Property.

14. Access Control

- a. Landlord shall provide new locks on all exterior doors and doors into common areas.
- b. Tenant may install card access to the Leased Premises at suite entry locations, fire stairs with access into the Leased Premises and interior doors within the Leased Premises compatible with the base building security system.
- c. Provide heavy-duty cylindrical hardware within suite and heavy duty mortised lockset at suite entry doors.
- d. Provide locksets on the following doors: offices, enclaves, communication rooms, utility rooms, storage/file rooms, network rooms.

INTERIOR BUILDOUT SPECIFICATIONS

1. Ceiling

- a. Existing ceiling tile and grid shall remain if these materials meet the Minimum Qualification Specification (Section e below) and are in good and attractive condition. Patch and repair grid as needed to accommodate demolition of walls. Replace any damaged or discolored tiles to match existing.
- b. Existing lighting shall be cleaned and re-lamped after construction. All lamps shall be the same color temperature. Coordinate the appropriate lamp color with the State.
- c. Provide 15'-20' whip at all above-ceiling junction boxes for power pole connections.
- d. Minimum ceiling heights shall be a minimum of 8 feet and be proportionate to the open area floor plate size.
- e. Acoustical Panel Ceiling Minimum Qualification Specifications:
- f. General Ceiling
 - i. Acoustical Panel Standard: Comply with ASTM E 1264.
 - ii. Metal Suspension System Standard: Comply with ASTM C 635.
 - iii. Attachment Devices: Size for five times the design load indicated in ASTM C 635, Table 1, "Direct Hung," Comply with seismic design requirements.
- g. Acoustical Panels
 - i. Color: White.
 - ii. LR: Minimum of 0.83.
 - iii. NRC: Minimum of 0.60, Type E-400 mounting according to ASTM E 795.
 - iv. CAC: Minimum of 33.
 - v. Modular Size: 24 by 24 inches (610 by 610 mm) or 24 by 48 inches (610 by 1220 mm).

2. Electrical and Communication

- a. Provide and install conduit, conductors, pull wires, boxes, cover plates, devices, etc., for all outlets as required by the Build Out Plans. All devices shall be a consistent color.
- b. Contractor shall be responsible for all coordination and final electrical connections for furniture (systems furniture, conference/training tables, etc.). Coordinate with State for specifics on wiring configurations. For general planning purposes, provide 1 circuit per every 2 standard workstations as required by the Build Out Plans.
- c. Provide 1 voice/data per standard workstation as required by the Build Out Plans.
- d. Provide 2 duplex power outlets and 1 voice/data per standard office as required by the Build Out Plans.
- e. Provide 2 duplex power outlets and 1 voice/data per enclave as required by the Build Out Plans.
- f. At minimum, all enclosed rooms (such as storage and file rooms) to have (2) convenience duplex power outlets as required by the Build Out Plans.
- g. Lighting and controls shall be properly zoned. Separate light switches for hardwall spaces shall be provided as required by the Build Out Plans.

3. Partitions

- a. All existing perimeter sill walls and core walls throughout space shall be freshly painted in an eggshell or satin paint finish.

- b. All new partitions to be 5/8" drywall and 3 5/8" metal studs with sound attenuation blankets inside the partition. Additional sound blankets to be provided above partitions on ceiling tile, 2'-0" on either side of all new or existing partitions not extending to the deck.
- c. Partitions around all new conference rooms, training rooms, break rooms, meeting rooms, and restrooms, shall extend to the deck. Sound attenuation blankets shall be provided inside the partition, seal all penetrations within partitions including power/data boxes and at the connection of the partition to the deck.
- d. Connections from partition to mullion will require an acoustically sealed connection.
- e. Finish partitions completely to floor.

4. Glazing

- a. All office, enclave, break room, and conference room front walls shall have a 3'-0" wide sidelite with ¼" clear tempered glass in 2" welded hollow metal frame with a solid core door (match building standard), and etched film on 3'-0"w full height sidelights. Framing for glass sidelights and windows shall be integral with doorframes and not separated by drywall.

5. Doors and Frames

- a. Interior doors shall match building standard height and finish; at a minimum, all doors shall be solid core, 7'-0" in height.
- b. Interior doorframes shall be 2" welded hollow metal steel, painted.
- c. All hardware shall match existing building standard finish. At a minimum, all hardware shall be lever handle. All doors shall include the following: doorstops, silencers, lever hardware, mortised ball bearing hinges. All office doors shall include a coat hook. In addition, pairs of doors shall include the following as determined by function: dummy trim, closer coordinators, flush bolts, dust proof strikes, ball catch (as required).
- d. All main entrance public access doors shall be metal frame glass storefront entrance type with double-pane glass. Exterior exit doors shall be metal framed with insulated flush type metal door. All exterior doors must be equipped with commercial grade closers and hardware.

6. Finishes

- a. Doors, frames, hardware, ceiling tile and grid and lights shall be reused if approved by the State.
- b. Carpet shall be modular tiles laid with low VOC adhesives. Carpet shall generally be laid in a monolithic, ashlar or brick laid pattern. Carpet shall not be laid in a quarter turn pattern unless noted specifically.
- c. Carpet must meet the following minimum qualification specifications:
 - i. Products: All manufacturers to provide modular tile products as specified below and in addition to meeting the minimum requirements.
 - ii. Commercial Face Fibers: High performance premium branded Nylon required to be third party certified post-consumer recyclable and defined as a commercial grade nylon fiber from a carpet or fiber manufacturer nationally recognized by the flooring industry; the nylon fiber shall have a documented five (5) year minimum successful testing period; Note: OLEFIN FIBER IS NOT ACCEPTABLE.
 - iii. Pile Characteristic: Level-loop, Cut-and-loop pile, Shear-and-loop pile.
 - iv. Density: Minimum rating of 5,000 or higher.
 - v. Stitches: Minimum of 9 stitches per inch.
 - vi. Gage: 1/12 inch minimum.
 - vii. Surface Pile Weight: Minimum 20 oz. per square yard.
 - viii. Dye System: Minimum of 50% solution dyed or yarn dyed (Type 6, Type 6,6 or proven equal).

- ix. Backing System: Provide applicable backing system based on carpet type/brand selected.
- x. Size: 24 by 24 inches (610 by 610 mm) or larger.
- xi. Applied Soil-Resistance Treatment: Duratech, Protech, or equal (specify with proposal).
- xii. Antimicrobial Treatment: Manufacturer's standard material according to AATCC174.
- d. Provide 4" covered rubber base in areas specified to receive new flooring. All base shall be continuous roll base (not 4' segments).
- e. All walls to have one prime coat and 2 finish coats of eggshell or satin finish. Door and window frames shall have semi-gloss finish. Drywall ceilings shall have flat finish.
- f. Where identified as laminate finish on casework, use color core laminates for exposed surfaces for doors, drawers, counter tops and splashes. The underside of all vertical laminate panels in wet areas shall receive a laminate or pvc edge to prevent water from wicking up through laminate panel substrates. Counters and splashes shall be thoroughly caulked to walls and countertops using clear silicone caulk.

7. Break Rooms

- a. Finishes: VCT floor tile in a floor pattern using 3 different colors, plastic laminate base and wall cabinets.
- b. Provide double bowl, under mount stainless steel sink with hot/cold water.
- c. Provide dedicated outlets for refrigerators, microwaves, and (2) coffee makers. Provide (3) standard wall duplex outlets at 42" AFF in kitchen area. Provide (2) additional wall outlets at other walls for convenience purposes.

8. Copy Rooms / Areas

- a. Finishes: VCT flooring, plastic laminate base and wall cabinets, plastic laminate countertop. Cabinetry shall be sufficient to meet the needs of the Tenant at its sole discretion.
- b. Provide (2) wall duplex outlets (one circuit) and (2) voice/data outlets at 42" AFF in work area.

9. Telecom Rooms

- a. Finishes: VCT flooring, 4" rubber base.
- b. Walls shall extend to deck; no lay-in ceiling.
- c. A minimum of a half-ton (5,000 BTU's) of cooling for coverage of equipment is required. Stand-alone mechanical unit is preferred. If stand-alone is not possible, then the space should be removed from the EMS and have VAV-type controls.
- d. Provide at least a 3" conduit from the interior telecom room or non-common space to an exterior right of way or utility easement for new service provider connection. Coordinate with service provider.
- e. Each telecom room should be a minimum of 8' x 10' in size, with one room per 15,000 square feet of usable space. Telecom rooms shall align vertically if in a multiple-floor facility.
- f. Doors to telecom rooms shall open out into the corridor, if possible. If this is not possible, then locate the door in an area with minimal clearance impact.
- g. Provide at least (2) dedicated quad outlets, 110 volt, 20 amp circuits, in addition to the normal service outlets.
- h. The State cabling contractor, at State's expense, shall install a grounding bus bar and place correctly-sized conductor back to the main panel for facility personnel to connect.
- i. Telecom rooms do not include space for building/energy automation/management, life safety controls, or security, audio, or CC/CATV systems.

10. Conference Rooms

- a. All conference rooms that seat (8) people or more shall have (2) power and voice/data outlets. Larger Conference rooms of greater than (18) people shall have (4) power and (2) voice/data outlets.
- b. Lighting switching shall provide flexibility for a variety of scene configurations for different presentations and meetings. Fixtures shall provide both ambient lighting to the table as well as accent wall wash lighting at the perimeter of the room.
- c. Coordinate placement of switches, AV screens, furniture, & doors so as to avoid conflicts when components are in use.

11. Restrooms

- a. All restrooms shall be equipped with liquid soap dispensers and mirrors, and either paper towel dispensers or hand blow dryers.
- b. Provide a floor drain in each restroom.

12. Janitor Closet

- a. Finishes: VCT flooring, 4" rubber base.
- b. Provide storage for equipment, materials, and supplies, in a minimum 25 sf room.
- c. Provide service sink with hot and cold water and a floor drain.


13. Building Interior

- a. Provide (accessible) chilled drinking fountains as per code requirements. If it is deemed necessary to replace existing or incorporate additional drinking fountains, equipment shall be able to accommodate a water bottle refill component.
- b. Provide evacuation maps and other interior signage as required and requested by the State. Coordinate locations with the State.

14. Building Exterior

- a. Provide exterior canopies at all building entrances and exits, as well as a vestibule/airlock at all public entrances.
- b. Provide exterior signage and dumpster access.
- c. Hard-surface exterior walkways shall be provided to connect all Building entrances and exits to on-site parking lots or other hard-surfaced areas.

**SCHEDULE 8
TRANSACTION WINDOW ELEVATION**

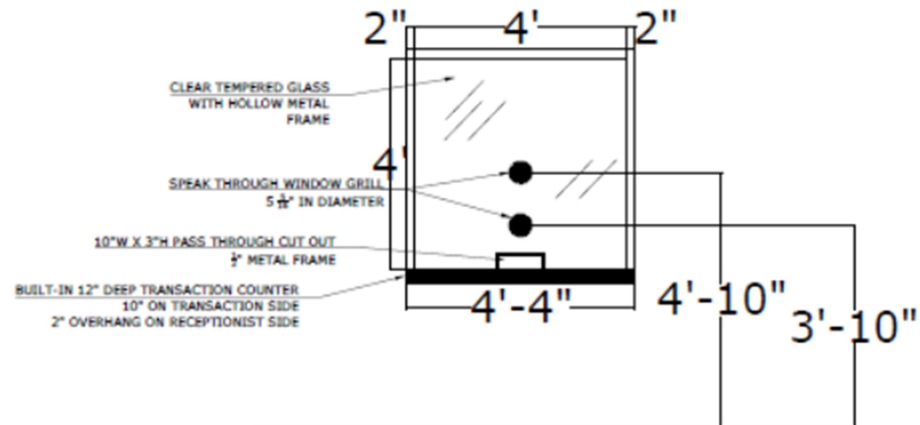

A **RECEPTION WINDOW TYP.**
SCALE: 1/2" = 1'0"